
Module 5: CPU Scheduling

- Basic Concepts
- Scheduling Criteria
- Scheduling Algorithms
- Multiple-Processor Scheduling
- Real-Time Scheduling
- Algorithm Evaluation

Basic Concepts

- Maximum CPU utilization obtained with multiprogramming.
- CPU–I/O Burst Cycle Process execution consists of a cycle of CPU execution and I/O wait.
- CPU burst distribution

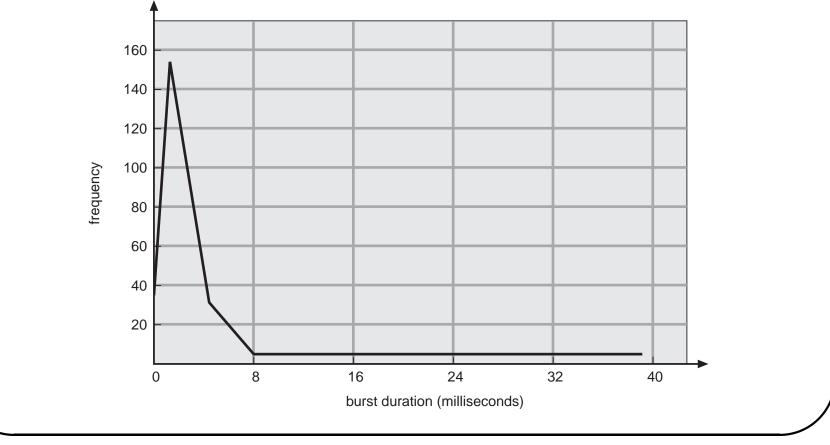

CPU Scheduler

- Selects from among the processes in memory that are ready to execute, and allocates the CPU to one of them.
- CPU scheduling decisions may take place when a process:
 - 1. switches from running to waiting state.
 - 2. switches from running to ready state.
 - 3. switches from waiting to ready.
 - 4. terminates.
- Scheduling under 1 and 4 is *nonpreemptive*.
- All other scheduling is *preemptive*.

Dispatcher

- Dispatcher module gives control of the CPU to the process selected by the short-term scheduler; this involves:
 - switching context
 - switching to user mode
 - jumping to the proper location in the user program to restart that program
- *Dispatch latency* time it takes for the dispatcher to stop one process and start another running.

Scheduling Criteria

- CPU utilization keep the CPU as busy as possible
- Throughput # of processes that complete their execution per time unit
- Turnaround time amount of time to execute a particular process
- Waiting time amount of time a process has been waiting in the ready queue
- Response time amount of time it takes from when a request was submitted until the first response is produced, **not** output (for time-sharing environment)


Optimization Criteria

- Max CPU utilization
- Max throughput
- Min turnaround time
- Min waiting time
- Min response time

First-Come, First-Served (FCFS) Scheduling

| • Example: | Process | Burst Time |
|------------|---------|------------|
| | P_1 | 24 |
| | P_2 | 3 |
| | P_3 | 3 |

• Suppose that the processes arrive in the order: *P*₁, *P*₂, *P*₃ The Gantt chart for the schedule is:

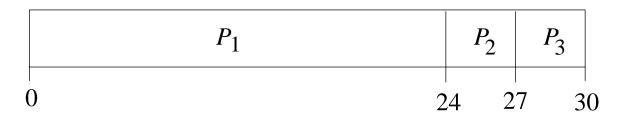


- Waiting time for $P_1 = 0$; $P_2 = 24$; $P_3 = 27$
- Average waiting time: (0 + 24 + 27)/3 = 17

FCFS Scheduling (Cont.)

Suppose that the processes arrive in the order:

 $P_2, P_3, P_1.$

• The Gantt chart for the schedule is:

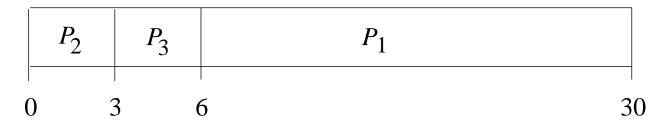

- Waiting time for $P_1 = 6$; $P_2 = 0$; $P_3 = 3$
- Average waiting time: (6 + 0 + 3)/3 = 3
- Much better than previous case.
- *Convoy effect*: short process behind long process


Shortest-Job-First (SJF) Scheduling

- Associate with each process the length of its next CPU burst. Use these lengths to schedule the process with the shortest time.
- Two schemes:
 - nonpreemptive once CPU given to the process it cannot be preempted until it completes its CPU burst.
 - preemptive if a new process arrives with CPU burst length less than remaining time of current executing process, preempt. This scheme is known as the Shortest-Remaining-Time-First (SRTF).
- SJF is optimal gives minimum average waiting time for a given set of processes.

Example of Non-Preemptive SJF

| Process | Arrival Time | Burst Time |
|---------|--------------|------------|
| P_1 | 0.0 | 7 |
| P_2 | 0.2 | 4 |
| P_3 | 4.0 | 1 |
| P_4 | 5.0 | 4 |


• SJF (non-preemptive)

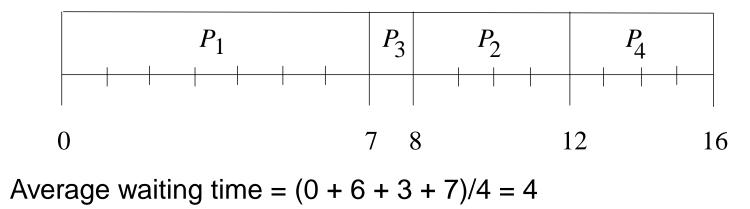

Example of Preemptive SJF

| Process | Arrival Time | Burst Time |
|---------|--------------|------------|
| P_1 | 0.0 | 7 |
| P_2 | 0.2 | 4 |
| P_3 | 4.0 | 1 |
| P_4 | 5.0 | 4 |

• SRTF (preemptive)

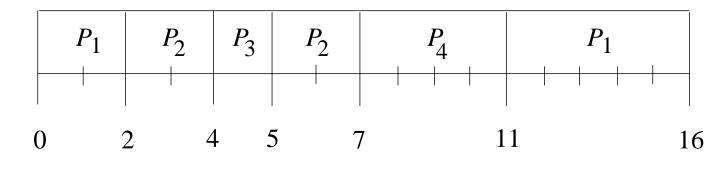

Average waiting time = (9 + 1 + 0 + 2)/4 = 3

Determining Length of Next CPU Burst

- Can only estimate the length.
- Can be done by using the length of previous CPU bursts, using exponential averaging.
 - 1. t_n = actual length of n^{th} CPU burst
 - 2. τ_{n+1} = predicted value for the next CPU burst
 - 3. α , $0 \le \alpha \le 1$
 - 4. Define:

$$\tau_{n+1} = \alpha t_n + (1 - \alpha)\tau_n.$$



• *α* = 0

 $- \tau_{n+1} = \tau_n$

- Recent history does not count.

- $\tau_{n+1} = t_n$
- Only the actual last CPU burst counts.
- If we expand the formula, we get:

$$\tau_{n+1} = \alpha t_n + (1 - \alpha) \alpha t_{n-1} + \dots + (1 - \alpha)^j \alpha t_{n-j} + \dots + (1 - \alpha)^{n+1} \tau_0$$

• Since both α and $(1 - \alpha)$ are less than or equal to 1, each successive term has less weight than its predecessor.

Priority Scheduling

- A priority number (integer) is associated with each process.
- The CPU is allocated to the process with the highest priority (smallest integer \equiv highest priority).
 - preemptive
 - nonpreemptive
- SJN is a priority scheduling where priority is the predicted next CPU burst time.
- Problem \equiv Starvation low priority processes may never execute.
- Solution \equiv Aging as time progresses increase the priority of the process.

Round Robin (RR)

- Each process gets a small unit of CPU time (*time quantum*), usually 10–100 milliseconds. After this time has elapsed, the process is preempted and added to the end of the ready queue.
- If there are *n* processes in the ready queue and the time quantum is *q*, then each process gets 1/*n* of the CPU time in chunks of at most *q* time units at once. No process waits more than (*n* − 1)*q* time units.
- Performance
 - $q \text{ large} \Rightarrow \text{FIFO}$
 - $q \text{ small} \Rightarrow q \text{ must}$ be large with respect to context switch, otherwise overhead is too high.

Example: RR with Time Quantum = 20

| Process | Burst Time |
|---------|------------|
| P_1 | 53 |
| P_2 | 17 |
| P_3 | 68 |
| P_4 | 24 |

• The Gantt chart is:

$$\begin{bmatrix} P_1 & P_2 & P_3 & P_4 & P_1 & P_3 & P_4 & P_1 & P_3 & P_3 \\ 0 & 20 & 37 & 57 & 77 & 97 & 117 & 121 & 134 & 154 & 162 \end{bmatrix}$$


• Typically, higher average turnaround than SRTF, but better *response.*

Multilevel Queue

- Ready queue is partitioned into separate queues; foreground (interactive) background (batch)
- Each queue has its own scheduling algorithm, foreground – RR background – FCFS
- Scheduling must be done between the queues.
 - Fixed priority scheduling; i.e., serve all from foreground then from background. Possibility of starvation.
 - Time slice each queue gets a certain amount of CPU time which it can schedule amongst its processes; i.e., 80% to foreground in RR 20% to background in FCFS

Multilevel Feedback Queue

- A process can move between the various queues; aging can be implemented this way.
- Multilevel-feedback-queue scheduler defined by the following parameters:
 - number of queues
 - scheduling algorithm for each queue
 - method used to determine when to upgrade a process
 - method used to determine when to demote a process
 - method used to determine which queue a process will enter when that process needs service

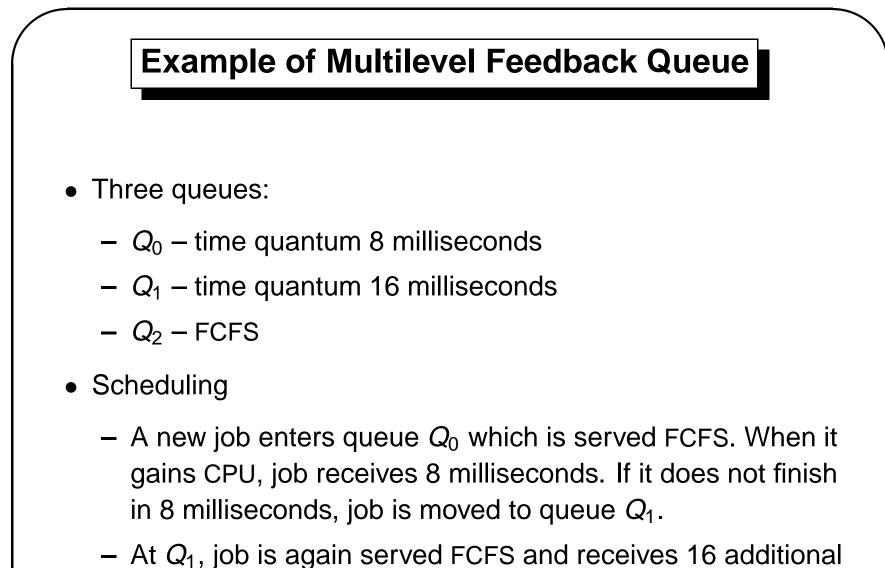

- At Q_1 , job is again served FCFS and receives 16 additional milliseconds. If it still does not complete, it is preempted and moved to queue Q_2 .

Multiple-Processor Scheduling

- CPU scheduling more complex when multiple CPUs are available.
- *Homogeneous* processors within a multiprocessor.
- Load sharing
- Asymmetric multiprocessing only one processor accesses the system data structures, alleviating the need for data sharing.

Real-Time Scheduling

- *Hard real-time* systems required to complete a critical task within a guaranteed amount of time.
- *Soft real-time* computing requires that critical processes receive priority over less fortunate ones.

Algorithm Evaluation

- *Deterministic modeling* takes a particular predetermined workload and defines the performance of each algorithm for that workload.
- Queueing models
- Implementation